

Beverly Display Solutions

PRODUCT SPECIFICATIONS

For Customer: _____ : APPROVAL FOR SPECIFICATION

Customer Model No. _____ : APPROVAL FOR SAMPLE

Module No.: BD-T101QIH-04

Date : 2014-02-25

Version : V0

Table of Contents

No.	Item	Page
1	Cover Sheet(Table of Contents)	
2	Revision Record	
3	General Specifications	
4	Outline Drawing	
5	Absolute Maximum Ratings	
6	Electrical Specifications and Instruction Code	
7	Optical Characteristics	
8	Reliability Test Items and Criteria	
9	Quality Level	
10	Packing Reliability	

For Customer's Acceptance:

Approved By	Comment

PREPARED	CHECKED	VERIFIED BY QA DEPT	VERIFIED BY R&D DEPT

Beverly Display Solutions

2. Revision Record

Date	Rev.No.	Page	Revision Items	Prepared
2014-02-25	V0		The first release	Wuliyang

Beverly Display Solutions

3. General Specifications

BD-T101QIH-04 is a TFT-LCD module. It is composed of a TFT-LCD panel, driver IC, FPC, a back light unit. The 10.1" display area contains 1280X800pixels

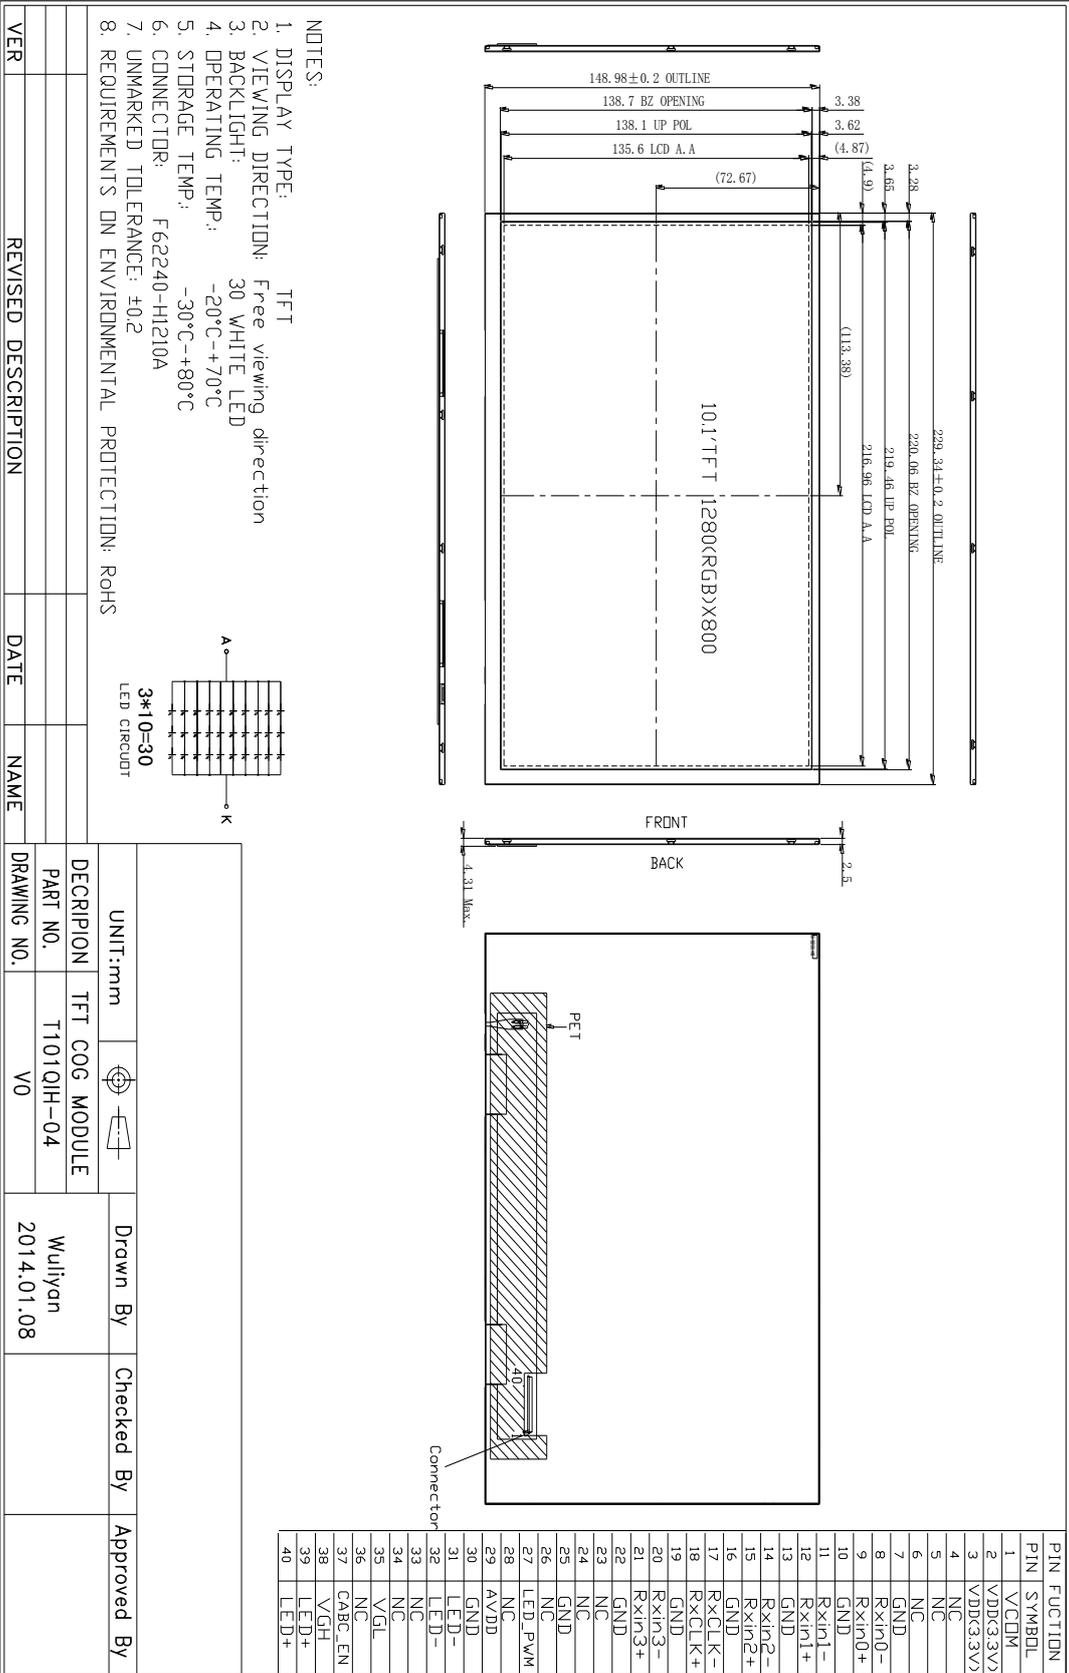
Item	Contents	Unit	Note
LCD Type	TFT IPS	-	
Display color	16.7M		1
Viewing Direction	Free view	O'Clock	
Operating temperature	-20~+70	°C	
Storage temperature	-30~+80	°C	
Module size	Refer to outline drawing	mm	2
Active Area(WxH)	216.96X135.6	mm	
Number of Dots	1280x800	dots	
Controller	--	-	
Power Supply Voltage	2.5	V	
Outline Dimensions	Refer to outline drawing	-	
Backlight	3X10-LEDs (white)	pcs	
Weight	---	g	
Interface	LVDS	-	

and can display up to 16.7M colors. This product accords with RoHS


Beverly Display Solutions

4. Outline Drawing

Beverly Display Solutions



- NOTES:
1. DISPLAY TYPE: TFT
 2. VIEWING DIRECTION: Free viewing direction
 3. BACKLIGHT: 30 WHITE LED
 4. OPERATING TEMP: -20°C-+70°C
 5. STORAGE TEMP: -30°C-+80°C
 6. CONNECTOR: F62240-HI210A
 7. UNMARKED TOLERANCE: ±0.2
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS



VER	REVISED DESCRIPTION	DATE	NAME

UNIT:mm	DESCRIPTION	TFT COG MODULE	Drawn By	Checked By	Approved By
	PART NO.	T101QH-04	Wuliyun		
	DRAWING NO.	V0	2014.01.08		

Beverly Display Solutions

5. Absolute Maximum Ratings(Ta=25°C)

5.1 Electrical Absolute Maximum Ratings.(Vss=0V ,Ta=25°C)

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V _{CC}	-0.3	2.8	V	1, 2

Notes:

1. If the module is above these absolute maximum ratings. It may become permanently damaged.
Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
2. V_{CC} > V_{SS} must be maintained.

5.2 Environmental Absolute Maximum Ratings.

Item	Storage		Operating		Note
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-30°C	80°C	-20°C	70°C	1,2
Humidity	-	-	-	-	3

1. The response time will become lower when operated at low temperature.
2. Background color changes slightly depending on ambient temperature.

The phenomenon is reversible.

3. Ta ≤ 40°C: 85%RH MAX.

Ta ≥ 40°C: Absolute humidity must be lower than the humidity of 85%RH at 40°C.

Beverly Display Solutions

6. Electrical Specifications and Instruction Code

6.1 Electrical characteristics(V_{ss}=0V ,T_a=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Note
Power supply	VDD	2.3	2.5	2.7	V	
	AVDD	8.0	8.2	8.4	V	
	VGH	21.7	22	22.3	V	
	VGL	-7.3	-7	-6.7	V	
Input signal voltage	VCOM	3.0	3.3	3.6	V	
Input logic high voltage	VIH	0.8VDD		VDD	V	
Input logic low voltage	VIL	0		0.2VDD	V	
Clock frequency	1/TC		71		MHZ	

Note:

1:When an optimum contrast is obtained in transmissive mode.

2: Tested in 1×1 chessboard pattern.

Beverly Display Solutions

6.2 LED backlight specification(VSS=0V ,Ta=25°C)

Item	Symbol	Condition	Min	Typ	Max	Unit	Note
Supply voltage	-	-	8.7	9.3	9.9	V	1
Supply current	I_f	-	180	200	220	mA	2
LED life time			20000	50000		hours	

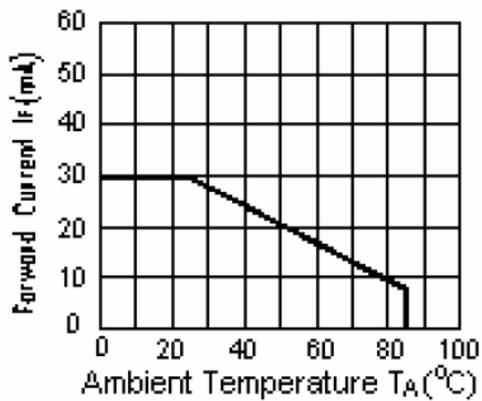
Note:

1: $V_{LED} = V_{LED(+)} - V_{LED(-)}$.

2: The current of LED is 20mA.

A LED drive in constant current mode is recommended.

3: LED power consumption is around 0.132W.



I_{LED} VS TEMP

Beverly Display Solutions

6.3 Interface signals

Beverly Display Solutions

Pin No.	Symbol	I/O	Function
1	VCOM	P	COMMON voltage
2~3	VDD	P	Power supply.
4~6	NC		No connection.
7	GND	P	Ground.
8	Rxin0-	I	-LVDS differential data input
9	Rxin0+	I	+LVDS differential data input
10	GND	P	Ground.
11	Rxin1-	I	-LVDS differential data input
12	Rxin1+	I	+LVDS differential data input
13	GND	P	Ground.
14	Rxin2-	I	-LVDS differential data input
15	Rxin2+	I	+LVDS differential data input
16	GND	P	Ground.
17	RxCLK-	I	-LVDS differential data input
18	RxCLK+	I	+LVDS differential data input
19	GND	P	Ground.
20	Rxin3-	I	-LVDS differential data input
21	Rxin3+	I	+LVDS differential data input
22	GND	P	Ground.
23~24	NC		No connection.
25	GND	P	Ground.
26	NC		No connection.
27	LED_PWM	I	CABC controller signal output for backlight
28	NC		No connection.
29	AVDD	P	Power for analog circuit.
30	GND	P	Ground.
31~32	LED-	P	LED cathode
33~34	NC		No connection.
35	VGL	P	Gate off voltage
36	NC		No connection.
37	CABC_EN	I	CABC enable input.
38	VGH	P	Gate on voltage
39~40	LED+	P	LED anode.

7. Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Brightness	Bp	$\theta=0^\circ$	300	350	-	Cd/m ²	1
Uniformity	ΔBp	$\Phi=0^\circ$	70	75	-	%	1,2
Viewing Angle	3:00	$Cr \geq 10$	75	85	-	Deg	3
	6:00		75	85	-		

Beverly Display Solutions

	9:00			75	85	-		
	12:00			75	85	-		
Contrast Ratio	Cr		$\theta=0^\circ$ $\Phi=0^\circ$	600	800		-	4
Response Time	T_r			-	10	20	ms	5
	T_f		-	15	30	ms		
Color of CIE Coordinate	W	x	$\theta=0^\circ$ $\Phi=0^\circ$		0.28		-	1,6
		y			0.33		-	
	R	x			0.51		-	
		y			0.34		-	
	G	x			0.31		-	
		y			0.56		-	
	B	x			0.15		-	
		y			0.14		-	


Note: The parameter is slightly changed by temperature, driving voltage and material

Note 1: The data are measured after LEDs are turned on for 5 minutes. LCM displays full white.
The brightness is the average value of 9 measured spots. Measurement equipment PR-705 ($\Phi 8\text{mm}$)

Measuring condition:

- Measuring surroundings: Dark room.
- Measuring temperature: $T_a=25^\circ\text{C}$.
- Adjust operating voltage to get optimum contrast at the center of the display.

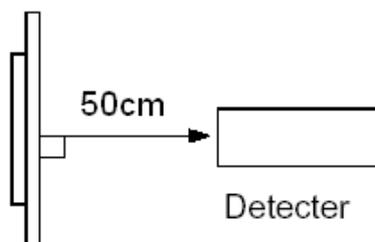Measured value at the center point of LCD panel after more than 5 minutes while backlight turning on.




Beverly Display Solutions

Note 2: The luminance uniformity is calculated by using following formula.

$$\Delta Bp = Bp (\text{Min.}) / Bp (\text{Max.}) \times 100 (\%)$$


Bp (Max.) = Maximum brightness in 9 measured spots

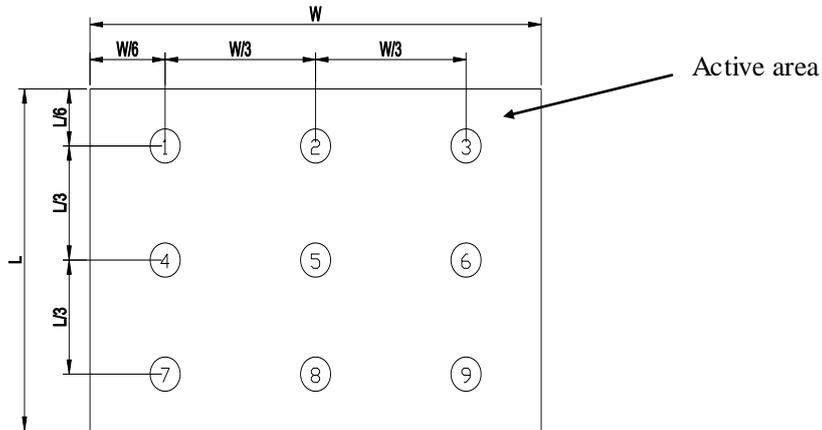Bp (Min.) = Minimum brightness in 9 measured spots.




Note 3: The definition of viewing angle:

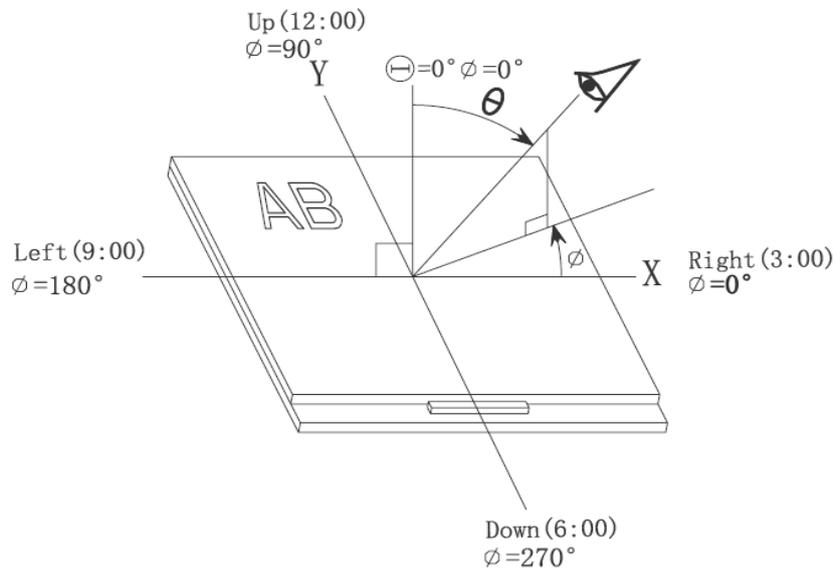Refer to the graph below marked by θ and ϕ



Note 4: Definition of contrast ratio.(Test LCD using DMS501)

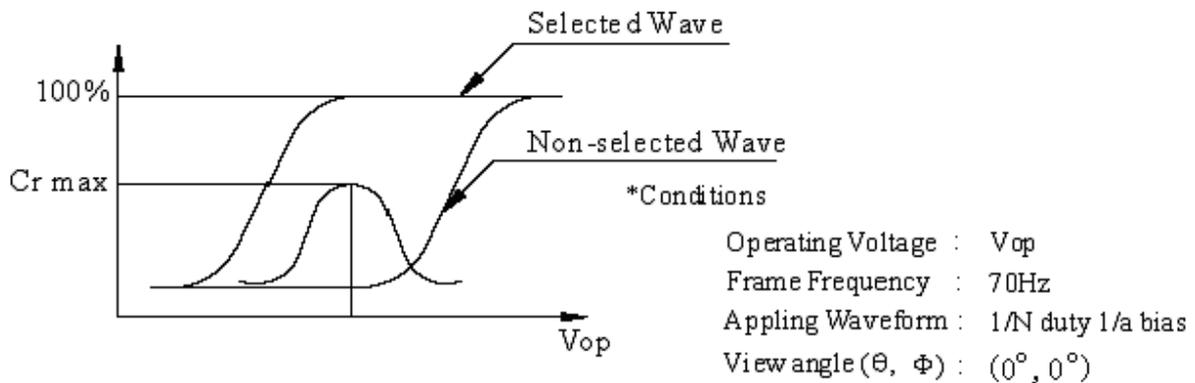
Beverly Display Solutions



$$\text{Contrast ratio}(Cr) = \frac{\text{Brightness of selected dots}}{\text{Brightness of non-selected dots}}$$

Note 5: Definition of Response time. (Test LCD using DMS501):

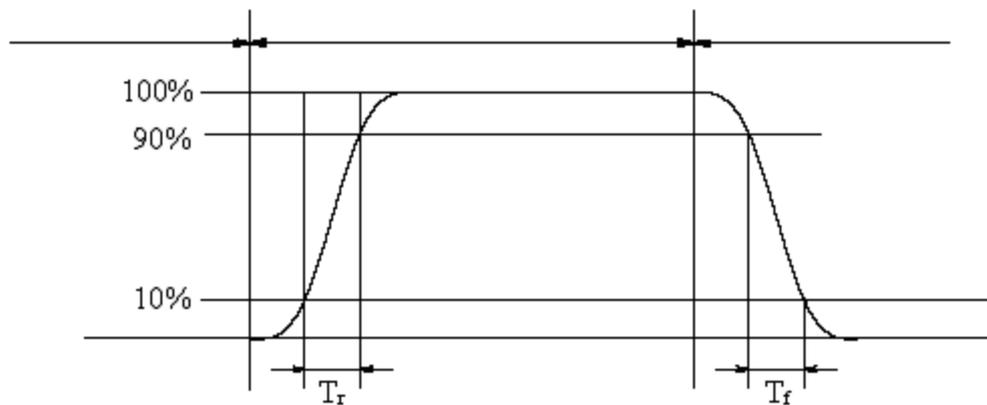
The output signals of photo detector are measured when the input signals are changed from “black” to “white”(falling time) and from “white” to “black”(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.



The definition of response time

Note 6: Definition of Color of CIE Coordinate and NTSC Ratio.

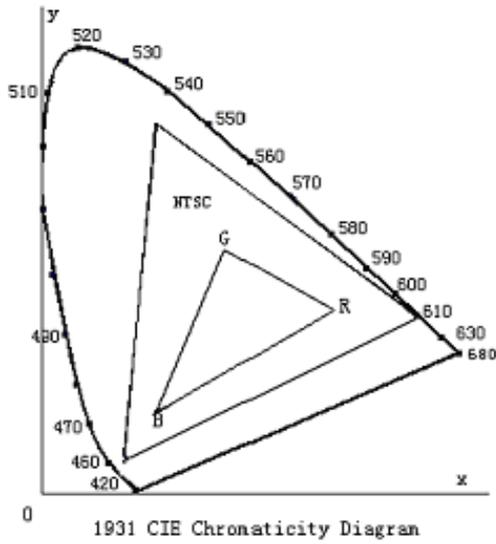Beverly Display Solutions




Color gamut:

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

Note 7: Definition of cross talk.

$$\text{Cross talk ratio(\%)} = \frac{|\text{pattern A Brightness} - \text{pattern B Brightness}|}{\text{pattern A Brightness}} \times 100$$

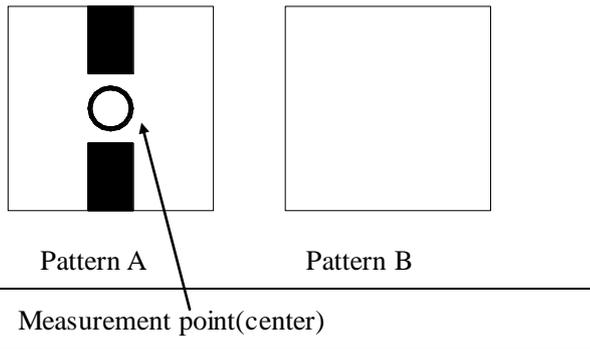

Electric volume value=3F+/-3Hex

Beverly Display Solutions

8. Reliability Test Items and Criteria

No	Test Item	Test condition	Criterion
1	High Temperature Storage	80°C±2°C 96H Restore 2H at 25°C Power off	1. After testing, cosmetic and electrical defects should not happen. 2. Total current consumption should not be more than twice of initial value.
2	Low Temperature Storage	-30°C±2°C 96H Restore 2H at 25°C Power off	
3	High Temperature Operation	70°C±2°C 96H Restore 2H at 25°C Power on	
4	Low Temperature Operation	-20°C±2°C 96H Restore 4H at 25°C Power on	
5	High Temperature/Humidity Operation	60°C±2°C 90%RH 96H Power on	
6	Temperature Cycle	-30°C ←————→ 80°C 30min 5min 30min after 5 cycle, Restore 2H at 25°C Power off	
7	Vibration Test	10Hz~150Hz, 100m/s ² , 120min	Not allowed cosmetic and electrical defects.
8	Shock Test	Half- sine wave, 300m/s ² , 11ms	

Note: Operation: Supply 2.8V for logic system.

The inspection terms after reliability test, as below

ITEM	Inspection
Contrast	CR>50%
IDD	IDD<200%
Brightness	Brightness>60%
Color Tone	Color Tone+/-0,05

Beverly Display Solutions

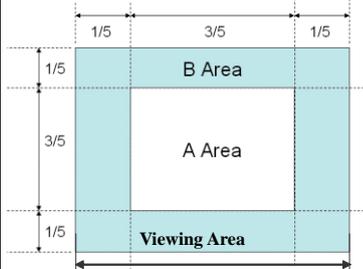

9 Quality level

9.1 Classification of defects

Major defects (MA): A major defect refers to a defect that may substantially degrade usability for product applications, including all functional defects (such as no display, abnormal display, open or missing segment, short circuit, missing component), outline dimension beyond the drawing, progressive defects and those affecting reliability.

Minor defects (MI): A minor defect refers to a defect which is not considered to be able to substantially degrade the product application or a defect that deviates from existing standards almost unrelated to the effective use of the product or its operation, such as black spot, white spot, bright spot, pinhole, black line, white line, contrast variation, glass defect, polarizer defect, etc.

9.2 Definition of inspection range

<p>For dot defect of TFT LCD which is not smaller than 3 inches, dividing three areas to make a judgment (according to figure 1).</p> <p>A area : center of viewing area B area : periphery of viewing area C area : Outside viewing area</p> <p>For other defects, dividing two areas to make a judgment (according figure 2).</p> <p>A zone : Inside Viewing area B zone : Outside Viewing area</p> <p>X1(A.A~V.A): 2mm X2(A.A~V.A): 2mm Y1(A.A~V.A): 2mm Y2(A.A~V.A): 2mm</p>	 <p>Figure 1</p>  <p>Figure 2</p>
--	--

9.3 Inspection items and general notes

General notes	<p>Should any defects which are not specified in this standard happen, additional standard shall be determined by mutual agreement between customer and our company.</p> <p>Viewing area should be the area which our company guarantees.</p> <p>Limit sample should be prior to this Inspection standard.</p> <p>Viewing judgment should be under static pattern.</p> <p>Inspection conditions</p> <p>Inspection distance: 250 mm (from the sample) Temperature : 25±5 °C</p> <p>Inspection angle : 45 degrees in 6 o'clock direction (all defects in viewing area should be inspected from this direction)</p>	
Inspection items	Pinhole, Bright spot, Black spot, White spot, Black line, White Line, Foreign particle, Bubble	The color of a small area is different from the remainder. The phenomenon doesn't change with voltage
	Contrast variation	The color of a small area is different from the remainder. The phenomenon changes with voltage
	Polarizer defect	Scratch, Dirt, Particle, Bubble on polarizer or between polarizer and glass

Beverly Display Solutions



	Dot defect (TFT LCD)	The pixel appears bright or dark abnormally when display
	Functional defect	No display, Abnormal display, Open or missing segment, Short circuit, False viewing direction
	Glass defect	Glass crack, Shaved corner of glass, Surplus glass
	PCB defect	Components assembly defect

9.4 Outgoing Inspection level




Outgoing Inspection standard	Inspection conditions	Inspection				
		Min.	Max.	Unit	IL	AQL
Major Defects	See 8.3 general notes	See 9.5			II	0.65
Minor Defects	See 8.3 general notes	See 9.5			II	0.65

Note: Sampling standard conforms to GB2828





9.5 Inspection Items and Criteria

Inspection items		Judgment standard					
		Category		Acceptable number			
				A zone	B zone		
1	Black spot, White spot, Pinhole, Foreign Particle, Particle in or on glass, Scratch on glass			A	$\Phi \leq 0.10$	Neglected	
				B	$0.10 < \Phi \leq 0.2$		1
				C	$0.2 < \Phi$		0
				D	-		-
				Total defective point(B,C)		1	
2	Black line, White line, and Particle Between Polarizer and glass, Scratch on glass			A	$W \leq 0.02$	Neglected	
				B	$0.02 < W \leq 0.03$ $L \leq 1.0$		1
				C	$0.03 < W \leq 0.05$ $L > 1.0$		0
				D	$0.05 < W, 1.0 < L$		0
				Total defective point(B,C)		1	
3	Bright spot	any size		none	none		

Beverly Display Solutions

4	Contrast variation	 $\Phi = (a+b)/2(\text{mm})$	A	$\Phi < 0.2$	Neglected	Neglected
			B	$0.2 < \Phi \leq 0.3$	2	
			C	$0.3 < \Phi \leq 0.4$	1	
			D	$0.4 < \Phi$	0	
			Total defective point(B,C)			3
5	Bubble inside cell		any size		none	none
6	Polarizer defect (if Polarizer is used)	Scratch ,damage on polarizer, Particle on polarizer or between polarizer and glass.	Refer to item 1 and item 2.			
			Bubble, dent and convex	A	$\Phi \leq 0.1$	Neglected
		B		$0.1 < \Phi \leq 0.2$	1	
		C		$0.2 < \Phi$	0	
7	Surplus glass	Stage surplus glass	 $B \leq 0.3\text{mm}$			
		Surrounding surplus glass	 Should not influence outline dimension and assembling.			
8	Open segment or open common	Not permitted				
9	Short circuit	Not permitted				
10	False viewing direction	Not permitted				
11	Contrast ratio uneven	According to the limit specimen				
12	Crosstalk	According to the limit specimen				
13	Black /White spot(display)	Refer to item 1				
14	Black /White line(display)	Refer to item 2				

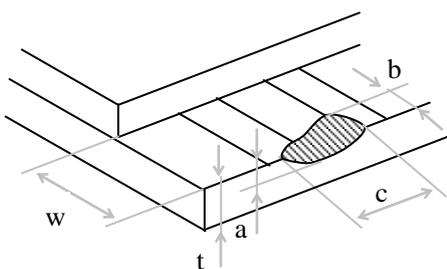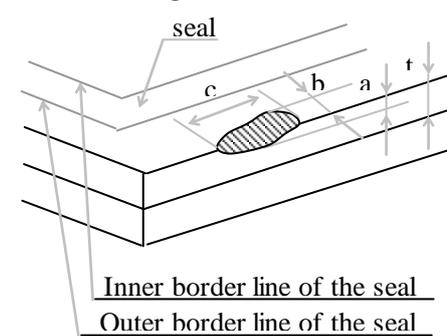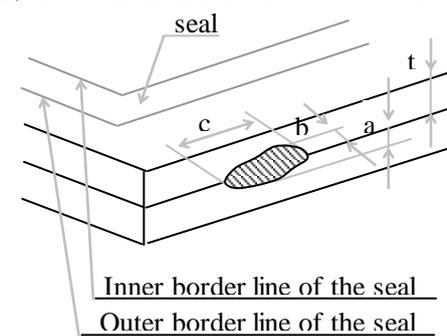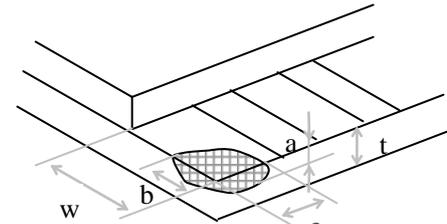
Beverly Display Solutions

Inspection items		Judgment standard		Acceptable number	
		Category(application: B zone)			
15	Glass defect crack	i) The front of lead terminals 	A	$a \leq t, b \leq 1/5W, c \leq 3\text{mm}$	Max.3 defects allowed
		ii) Surrounding crack-non-contact side 	B	Crack at two sides of lead terminals should not cover patterns and alignment mark	
		iii) Surrounding crack- contact side seal 		$b < \text{Inner borderline of the seal}$	
			$b < \text{Outer borderline of the seal}$		
	iv) Corner 	A	$a \leq t, b \leq 3.0, c \leq 3.0$		
		B	Glass crack should not cover patterns u and alignment mark and patterns.		

Beverly Display Solutions

Inspection items		Judgment standard	
		Category(application: B zone)	
16	PCB defect	<p>Component soldering: No cold soldering、short、open circuit、burr、tin ball The flat encapsulation component position deviation must be less than 1/3 width of the pin (Pic.1); the sheet component deviation: Pin deviates from the pad and contact with the near components is not permitted (Pic.2)</p>	
		<p>lead defect: The lead lack must be less than 1/3 of its width; The lead burr must be less than 1/3 of the seam; Impurities connect with the near leads is not permitted</p>	
		<p>Connector soldering: Soldering tin is at contact position of the plug and socket is not permitted No foundation is scald Serious cave distortion on plug and socket contact pin is not permitted</p>	

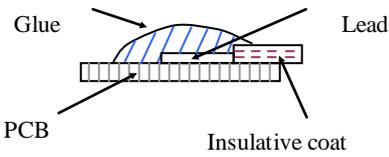Beverly Display Solutions

	<p>Glue on root of the speaker receiver and motor lead: The insulative coat of the lead must join into the PCB; the protected glue must envelop to the insulative coat.</p>	 <p>The diagram illustrates the assembly of a speaker receiver and motor lead on a PCB. The PCB is a horizontal strip with a grid of pads. A speaker receiver is mounted on the PCB, and a motor lead is attached to it. The lead is covered with an insulative coat. Glue is applied to the root of the speaker receiver and the motor lead, and the insulative coat is joined to the PCB.</p>
--	---	---

10. Precautions for Use of LCD Modules

10.1 Handling Precautions

10.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer.

Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

10.1.6 Do not attempt to disassemble the LCD Module.

10.1.7 If the logic circuit power is off, do not apply the input signals.

Beverly Display Solutions

10.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- a. Be sure to ground the body when handling the LCD Modules.
- b. Tools required for assembly, such as soldering irons, must be properly ground.
- c. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

10.2 Storage precautions

10.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2 The LCD modules should be stored under the storage temperature range.

If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Relatively humidity: $\leq 80\%$

10.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

Beverly Display Solutions
